


A photograph of a large, yellow industrial belt unit in a factory setting. The unit is a long, rectangular structure with a yellow exterior and a blue base. It has several doors and a control panel on the side. A large, silver, flexible duct is connected to the top of the unit. The unit is situated in a large industrial building with a high ceiling and metal trusses.

**BELT
UNITS**

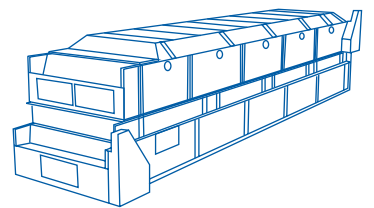


**FOR DRYING AND
COOLING, FOR HIGH
CONTINUOUS LOAD**

KAHL BELT UNITS

More than 1,000 KAHL belt driers and coolers are used worldwide for various technical applications


KAHL belt driers/coolers are appropriate for different types of products. Examples: Pellets, extruded products, Expandat®,

agglomerates, pasty products, wood shavings, biomass, and chemical products.

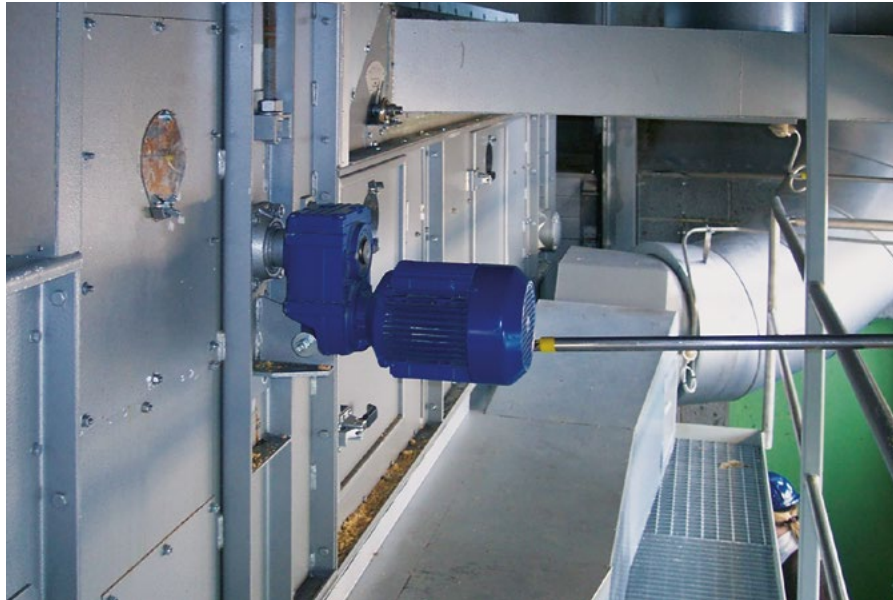

DRIER DESIGN

AMANDUS KAHL has long-standing experience with regard to design, planning, projecting, and commissioning of belt driers and belt coolers. For tests for design and projecting, a belt drier and a belt drier simulator are available in our own pilot plant.

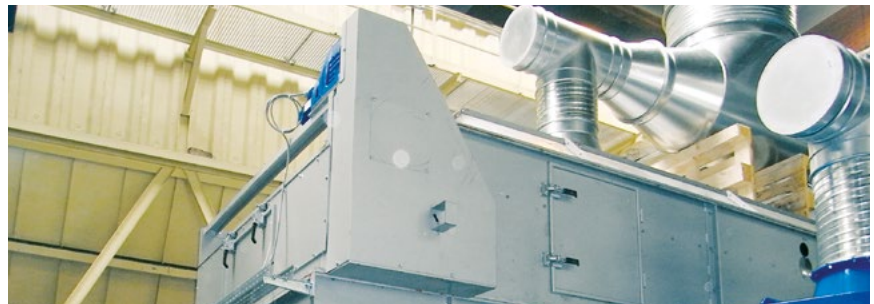

KAHL BELT UNITS FOR DRYING AND COOLING



If KAHL belt units are used for cooling, cooling is obtained by two physical processes:

Convection cooling
= heat exchange between product and air


Evaporative cooling
= removal of water from the product

Cooling/drying is achieved according to the cross and counter-current principle, depending on the number of belts. During the drying process, hot air flows through the product from the

top or from the bottom transversely to the running direction of the conveyor belts. In the process, the air increasingly absorbs the moisture of the product. Thus gentle drying is achieved.

Due to the modular design the belt units can be arranged so as to suit the required respective plant size.

PROCESS SURFACE IN MODULAR DESIGN

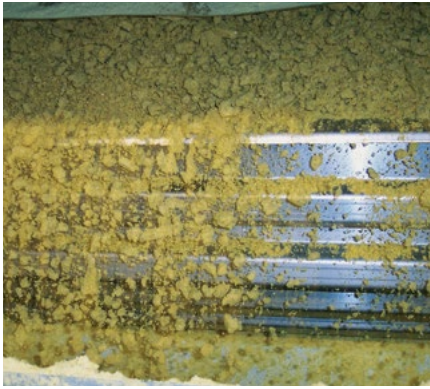

Belt coolers and driers are designed to suit both small and large units according to the modular principle. Parameters for design are for example the type of product, quantity, temperature, initial moisture, removal of moisture, condition of process air, type of heating. The retention time of the product is determined by the belt length and the speed range of the belt drive. The conveying belt can consist of slotted plates which are laterally screwed onto conveying chains and are easy to replace. Fines falling through the slots are conveyed to a separate outlet by brushes and then discharged. Lamellar plates are also available.

Fabric Belt Drier

Another possibility is to use a close-meshed plastic fabric belt, which does not only convey the material to be dried through the drier, but also filters the exhaust air. With this method, for example, the legal limits of dust content in the exhaust air can be complied with when drying wood shavings. Drive is effected by variable-speed geared motors allowing for adjustment of the layer level and retention time.

ADVANTAGES


- Depending on the design, subsequent increases in capacity are possible by extensions or additional storeys
- Several standard widths are available
- Special widths can be supplied

PRODUCT SHAPES

- Crumbles
- Pellets
- Briquettes
- Lumps
- Powdery products
- Expanded products
- Pasty products
- Extruded products
- Bulk products

INDUSTRIAL SECTORS

- Compound feed
- Sugar
- Food
- Recycling
- Disposal
- Chemical industry
- Brewery
- Energy industry
- Agriculture
- Biomass

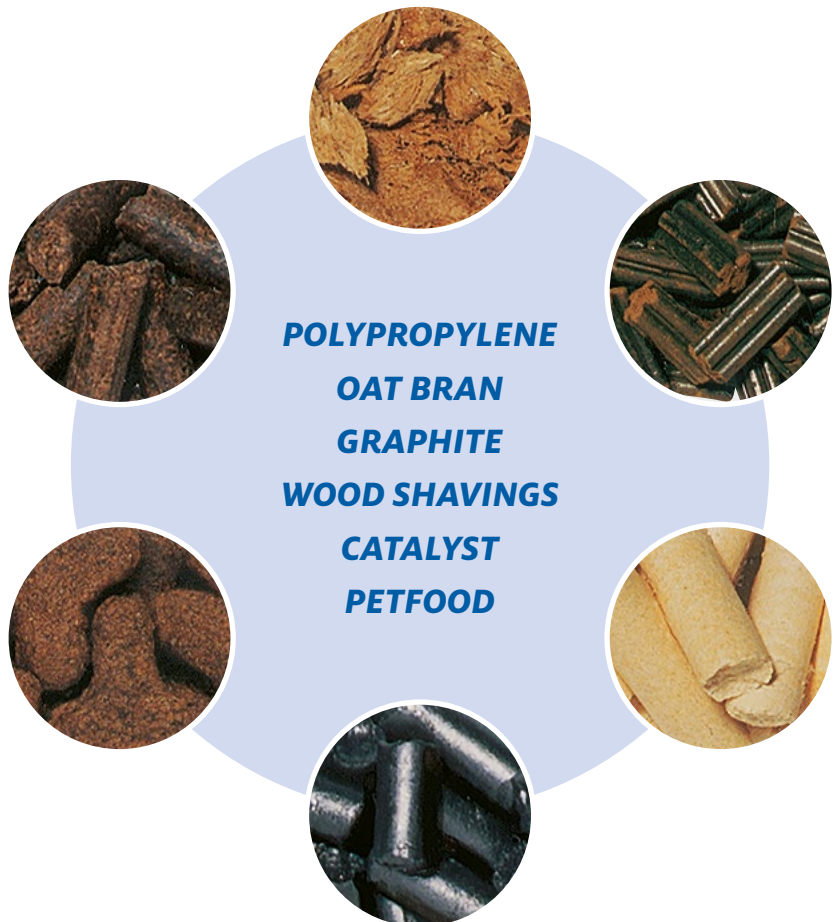


Process surface in modular design: 2 m² – 350 m²

Layer levels between 30 and 300 mm





DRYING

Process air (directly or indirectly heated) is drawn through one or more product layers. Drying by process air at up to 200°C for products with high moisture levels which may be discharged at high temperatures, e.g. cat litter, charcoal briquettes, filter sludges, metal oxides etc.

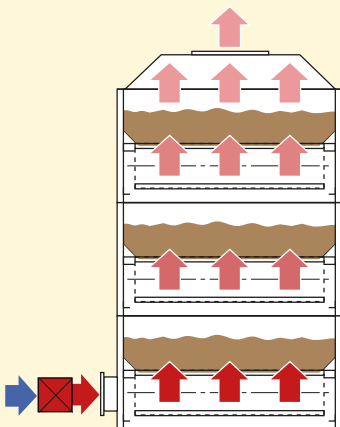


COOLING


Cooling by ambient air (or cooled process air) of the full range of products with limited moisture levels which must be cooled to a low storage temperature, e.g. compound feed pellets, expanded products, dried beet pulp pellets, synthetic waste, graphite etc.

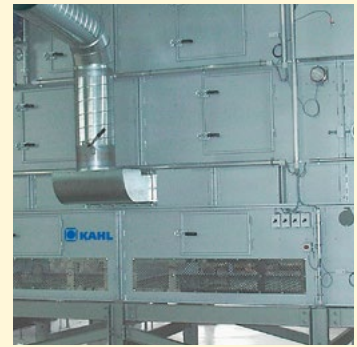

DRYING AND COOLING


Both processes take place in a single belt unit subdivided into independent drying and cooling sections and equipped with suitable heating and cooling devices. For products with high moisture levels which must be cooled down to a low storage temperature, such as expanded and extruded products or those from hydrothermal treatment processing, FGD gypsum pellets etc.

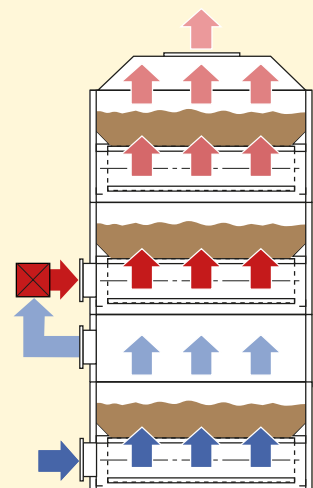

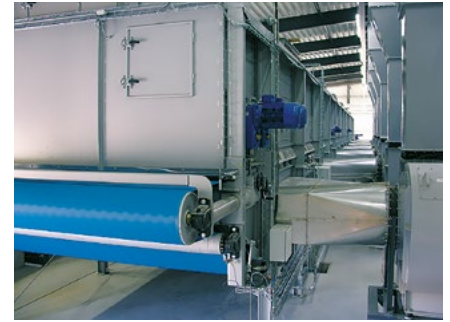


DRYING WITH INTEGRATED FILTERING OF THE EXHAUST AIR

As the hot air flows from above through the product to be dried, a higher flow speed can be realized. Furthermore, the closely woven plastic belt filters the exhaust air. A system for cleaning this belt is integrated in the drier.

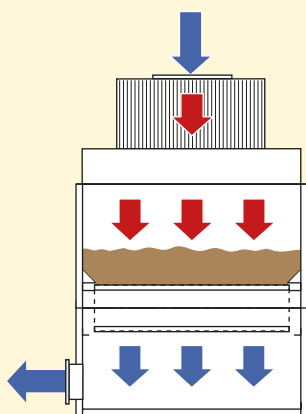

DRYING AND COOLING WITH RECIRCULATED AIR


Due to the lower exhaust air quantities produced during the cooling, the drying or the combined process, recirculated air systems lead to a reduction of emissions and heat losses. The percentage of recirculated air is adjustable. Delicate products are gently treated by reducing the process speed. For delicate products with low final temperature, e.g. shrimp feed, sewage sludge etc.

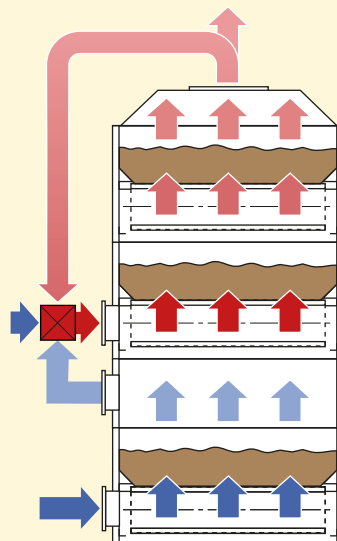

EXAMPLES OF PRODUCTS

- Pelleted and expanded feed
- Petfood
- Fish feed
- Biomass
- Dried beet pulp and beet pulp pellets
- Chopped grass
- Alfalfa
- Cereals
- Hop umbels
- Wood chips
- Wood shavings
- Sewage-sludge pellets
- FGD-gypsum pellets
- Coal products
- Charcoal briquettes
- Activated carbon
- Recycling products
- etc.

BELT UNITS FOR DRYING AND COOLING OF BULK MATERIALS WITH CHAIN-GUIDED SLOTTED PLATES

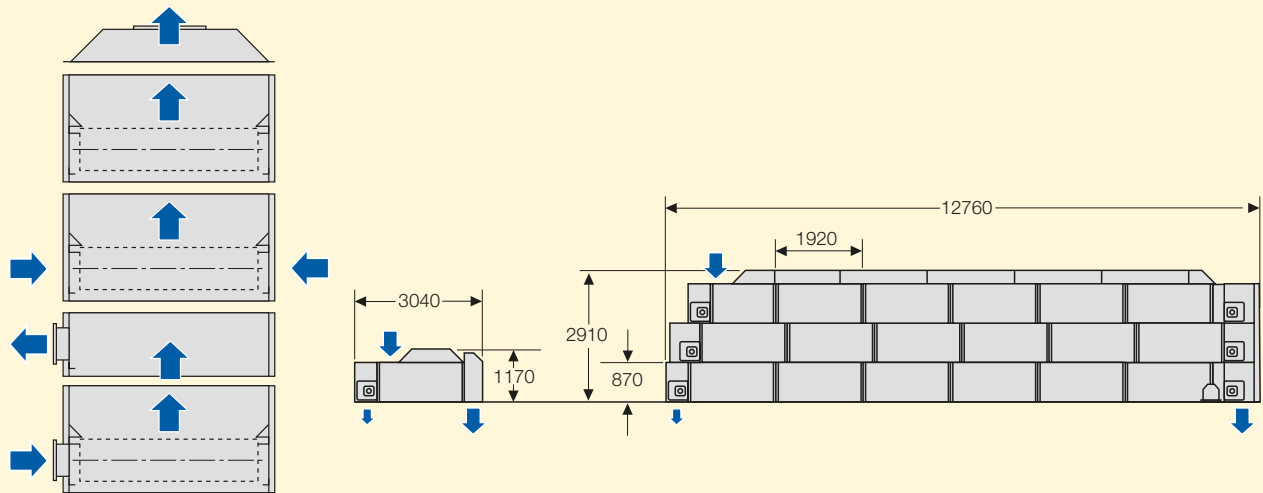


Width of the slotted plate	mm	1150	1500	2000	2870
Total width without drive	mm	1400	1750	2250	3120
Length per belt section	mm	1920	1920	1920	1920

*based on a layer level of 300 mm

Intermediate aspiration for the separation of the process sections, e.g. pre-cooling and post-cooling, pre-drying and post-drying, drying and cooling.

BELT UNITS WITH PLASTIC FABRIC BELTS

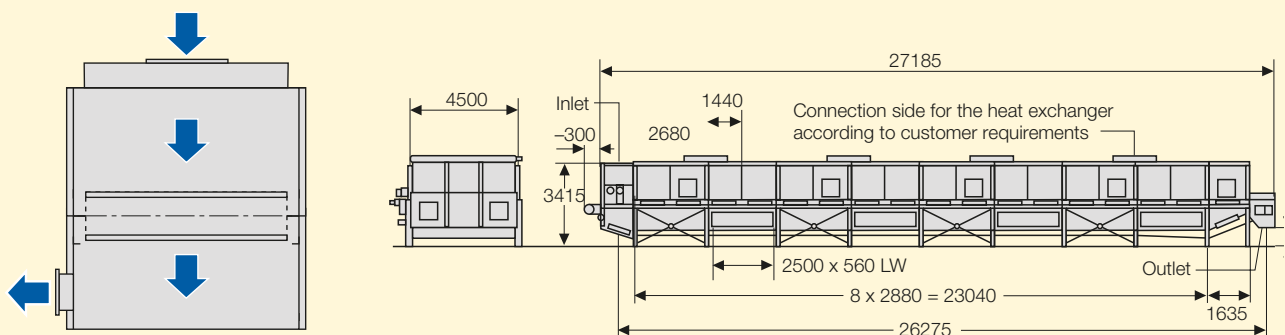

Width of fabric belt	mm	4000	6000
Total width without drive	mm	4500	6500
Length per section	mm	2880	2880
Min./max. lengths	m	9,9/47,5	9,9/42
Max. layer level	mm	250	300
Sections, max.	Number	15	13


FEEDING DEVICES

HOT AIR GENERATION

- Direct air heating
- Indirect air heating
- Differential pressure measurement system
- Fire-extinguishing system


HEAT CARRIERS

- Firing
- Steam
- Hot water
- Thermal oil

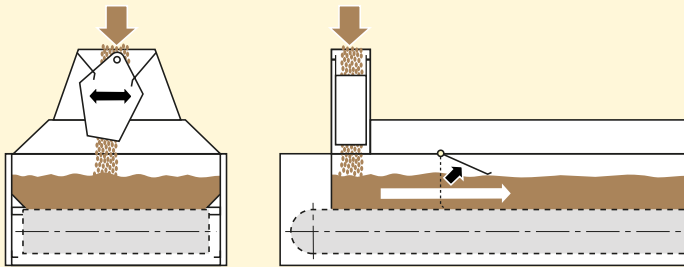


Swivel box

For insensitive products with high layer levels.

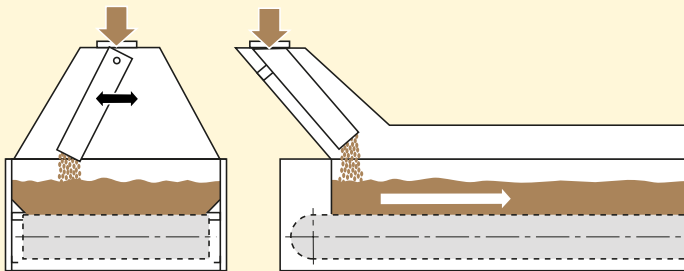


Swivel chute

For delicate products with different layer levels.

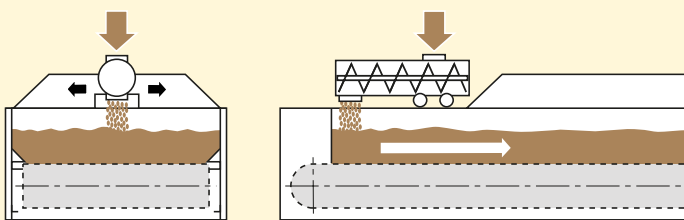

Swivel screw

For insensitive products requiring loosening and lump reduction.

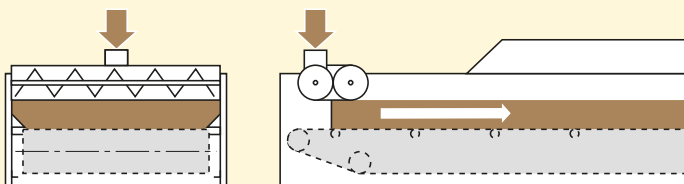

Distribution screw system (fabric belt drier)

For dusty, fibrous products for very uniform layer levels, particularly in the fabric belt drier.

ACCESSORIES AND CONTROL

- Product-contacting parts made of stainless steel
- Loosening rakes
- Lump crusher
- Outlet box with pile-up indicator
- Fines discharge screw
- Layer level indicator
- Temperature controller for exhaust air and/or product
- Speed / standstill monitor
- Belt speed control
- Layer level control
- Online measurements of the product moisture at the inlet and outlet of the drier as well as measurements of the exhaust air temperatures and exhaust air moistures in the individual sections provide the necessary parameters for possible control and regulation concepts
- Automatic belt cleaning system
- Differential pressure measurement system
- Fire-extinguishing system

SPECIAL DESIGNS

- Belt units completely made of stainless steel
- CARRY OVER (fines are discharged together with the product)
- Wide lateral and front inspection doors
- Fabric belt



AMANDUS KAHL GmbH & Co. KG
Dieselstrasse 5-9 · 21465 Reinbek
Hamburg, Germany

+49 (0) 40 72 77 10
info@akahl.de
akahl.de